



Ausschuss zur
gesundheitlichen
Bewertung von
Bauprodukten



MISSIONS DANS L'AIR INTERIEUR
A+
A+ | A | B | C



DC系列

生态稻草泥色卡

Ecological straw ooze

vanlei万磊®

DC

万磊生态稻草泥 - DC系列



稻草,早已在原始社会时期就被原始人类用以保暖。他们在后来逐步摸索出利用干枯的稻草架搭建出草棚的方法,这些“保暖稻草”为人类的生生不息提供了安全的保障,同时,温暖舒适的环境也让人类社会慢慢出现了“家”的概念。1997年,在经过数百万年的演变后,“万磊”首创的生态稻草漆,带着醉人的沁香,将这种原始的田园风格,以最原汁原味的生活方式,再次呈现在世人面前。

Straw has long been used by primitive humans to keep warm in primitive society. Later, they gradually figured out the method of using the dry straw frame to build a straw shed. These "warm straws" provide a safe guarantee for the endless life of human beings. home" concept. In 1997, after millions of years of evolution, the ecological straw paint pioneered by "Wan Lei", with an intoxicating fragrance, once again presented this primitive pastoral style in the most original way of life. in front of the world.

主要成分: 纳米乳、田间稻秆、无机棒土、纳米碳酸钙粉、纯净水

Main ingredients: field rice straw, inorganic stick soil, nano-calcium carbonate powder purified water, nano-emulsion



PRODUCT FEATURES

产品特点



三大核心专利



30年匠心专注



有机无添加



空间原生态



SCOPE OF APPLICATION

适用范围

田园、中式、古典、地中海装饰风格等仿古建筑群

Features:

- Good flexibility, not easy to crack, and has the effect of thermal insulation
- Seamless coating, no harmful substances, waterproof and anti-fouling
- Simple and rough, refreshing local flavor
- Original, simple, warm and pleasant building materials

Supporting tools: wool roller, batch knife, scraper, wool gloves, sandpaper

Scope of application: pastoral, Chinese, classical, Mediterranean decorative style and other antique buildings

Reference dosage: 0.8-2.5kg/m²

Water ratio: Fine straw: dry powder: water = 20:10
Medium straw: dry powder: nano liquid: water = 18:1.5:5
Coarse straw: dry powder: nano liquid: water = 18:1.5:4.7

Filling water and starting materials: First pour 80% water into the mixing bucket, pour in the main material of straw mud, and stir for about 3-5 minutes. Add the last 20% of the water after ensuring uniformity, and continue to stir for 3-5 minutes



CONSTRUCTION STEPS

施工步骤

- 无机抗碱底漆,均匀涂刷同色底漆
- 平批主材,用刮板表面打圈,使稻草不规则排布,干燥后轻微打磨去尘
- 表面上色,辊涂专用颜色1-2遍
- 表面擦色,辊涂防水保护膜(1-2遍),随后用擦色工具进行擦色工序
- 保护膜,喷涂或辊涂哑光保护膜(擦色时不需要此工序)

Construction method:

- Inorganic anti-alkali primer, evenly apply the same color primer
- The main material of the batch is flat, and the surface of the scraper is used to make circles to make the straw irregularly arranged. After drying, it is slightly polished to remove dust.
- The surface is colored, and the special Ecological straw ooze is applied by roller 1-2 times.
- Wipe the surface, apply the waterproof protective film by roller (1-2 times), and then use the wiping tool to carry out the wiping process
- Protective film, spray or roll matte protective film (this process is not required when wiping color)

配套工具: 羊毛辊筒、批刀、刮板、羊毛手套、砂纸

配套体系: 生态稻草泥主材+纳米添加液+手蜡(配备时)

兑水比率: 细稻草:干粉:水=20:10 中稻草:干粉:纳米液:水=18:1.5:5
粗稻草:干粉:纳米液:水=18:1.5:4.7

注水开料: 搅拌桶内先注入8成水,倒入稻草泥主材料,搅拌稠打约3-5分钟。确保均匀后加入最后2成水,继续搅拌3-5分钟

保质期: 常温干燥状态下12个月(原装出厂时)

Shelf life: 12 months in a dry state at room temperature (original factory)

执行标准: GB 18582-2020《室内装饰装修材料内墙涂料中有害物质限量》

Executive standard: GB 18582-2020

注意事项:

- 使用前阅读包装的施工说明,以获得可靠和满意的涂装效果
- 请有效分隔、覆盖和遮蔽木质品与墙面的区域
- 切勿多加水量,同型号不同批次产品会存在色差
- 气温低于10°C,相对湿度大于80%情况下不能施工

Precautions:

- Read the construction instructions of the package before use to obtain a reliable and satisfactory coating effect
- Please effectively separate, cover and shield the area between wood products and walls
- Do not add more water, there will be color difference between different batches of products of the same model
- When the temperature is lower than 10°C and the relative humidity is higher than 80%, construction cannot be carried out.

技术参数	Technical parameters	粉体涂料	Powder coating
材料性能	Material Properties	粉体涂料	Powder coating
干膜厚度	Dry film thickness	2-3mm	2-3mm
干燥时间(表干)	Drying time (surface drying)	<2h(25-27°C)	<2h(25-27°C)
干燥时间(硬)	Drying time (hard)	>72h(25-27°C)	>72h(25-27°C)
涂层	Coating layer	2次 / 2 times	2 times
使用寿命	Service life	>10年 / > 10 years	> 10 years
涂料颜色	Paint color	多色选择 / Multicolour >	Multicolour >
贮存	Storage	5-35°C, 凉爽, 干燥 / 5-35°C	5-35°C, cool, dry / 5-35°C



产品施工视频



VR全景展示

生态稻草泥 - DC系列

ECOLOGICAL STRAW OOZE

稻草精选“鱼米之乡”一年一收所产纯天然收割即揉碎的稻草杆，保证稻草杆的“新鲜肥美”。
精选稻草：自然色、有韧劲、呈现金黄。

细无机稻草泥 (XDC)

包装净重:20kg
涂布率(批涂):0.8-1.2kg/m²
装箱规格:无箱运输
工具组合:请使用不锈钢批刀
使用标准:内外墙使用
耐寒能力:低温地区需作保温处理
色系配比:所有配套颜色均为添加色浆

配套信息指示表

底漆	可使用金装白色底漆(22kg)
面漆	透明哑光面漆(5kg / 18kg)

中生态稻草泥 (ZDC)

包装净重:18kg主材+1.5kg添加剂+色浆
涂布率(批涂):1.5-1.8kg/m²
装箱规格:无箱运输
工具组合:请使用不锈钢批刀
使用标准:内外墙使用
耐寒能力:低温地区需作保温处理
色系配比:所有配套颜色均为添加色浆
(擦色部分使用1.5kg擦色手蜡)

配套信息指示表

底漆	可使用金装白色底漆(22kg)
面漆	透明哑光面漆(5kg / 18kg)

粗生态稻草泥 (TDC)

包装净重:18kg主材+1.5kg添加剂+色浆
涂布率(批涂):2-2.5kg/m²
装箱规格:无箱运输
工具组合:请使用不锈钢批刀
使用标准:内外墙使用
耐寒能力:低温地区需作保温处理
色系配比:所有配套颜色均为添加色浆
(擦色部分使用1.5kg擦色手蜡)

配套信息指示表

底漆	可使用金装白色底漆(22kg)
面漆	透明哑光面漆(5kg / 18kg)



- 本页产品  不含纳米液添加剂 -



XDC - 基料



XDC - 0102 (100g)



XDC - 0141 (100g)



XDC - 1362 (100g)



XDC - 0101 (100g)



XDC - 0901 (100g)



XDC - M31 (100g)



XDC - 0122 (100g)



XDC - 0902 (100g)





XDC - M18 (100g)



XDC - 0142 (100g)



XDC - 0906 (100g)

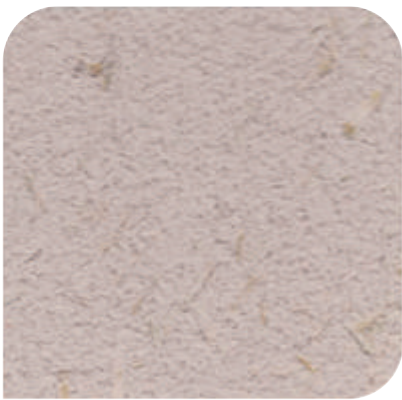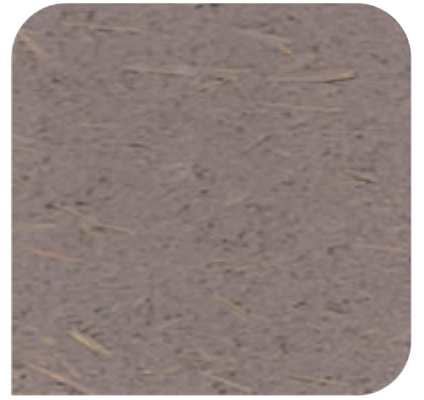







中国的 · 好涂料

万磊建筑涂料有限公司

Foshan City Nanhai Wanlei Building Paint CO., LTD



广东生产基地（代码FS）

广东省佛山市南海区松岗万石工业区

广州分公司

广州市荔湾区羊城装饰材料市场118号

广西生产基地（代码QT）

广西壮族自治区贵港市覃塘区产业园甘化园区

南宁分公司

广西壮族自治区南宁市兴宁区快环建材市场

△ 注意

公司根据产品技术和发展需要, 有权对产品配方进行更新升级, 而不对外另行公布, 请以最新样板册颜色为准, 不便之处, 敬请原谅!

4000-147-187 www.fswanlei.com